



A compact version of the MistBuster® 850 electrostatic precipitation air cleaning system for the source capture and removal of smoke, mist and metal particles generated by today's machining applications. In the MistBuster® product family, the system provides a higher spindle speed and coolant pressure (600–1,500 PSI).

The MistBuster® 850 Compact four-stage air filtration system features Air Quality Engineering, Inc.'s patented Advantage™ electronic collector cell and an additional high-efficiency electronic collector cell. The electronic collector cells provide a collection efficiency up to 98.6% on all submicron particles. Using Air Quality Engineering, Inc.'s patented variable voltage coolant selector, simply switch between water-soluble or oil-based machine tool coolants. Airflow is variable and controllable up to 850 CFM.

Machining applications

- Metal machining
- EDM mist collectors
- Grinding/polishing

Specifications

Airflow	Variable to 850 CFM	
Cabinet	18 gauge steel cabinet with powder coated chemical resistant baked enamel, available in grey textured finish	
Power Input	115 VAC, 60 Hz, 1 ph, 3.9 A 240 VAC, 60 Hz, 1 ph, 1.95 A 460 VAC, 60 Hz, 1 ph, 0.98 A (connects to two legs of 460 VAC, 3 ph)	
Efficiency	Ultimate efficiency up to 97.8% on all submicron particles as measured by independent lab test in accordance with ASHRAE standard 52.2 at 500 CFM	
Filtration Stages	<p>1st Stage: 4" aluminum mesh impinger</p> <p>2nd Stage: AQE Advantage™ electronic cell (long life)</p>	<p>3rd Stage: Optional HEPA filter 99.97% efficiency, ESF filter, or carbon module</p>
Features and Benefits	<ul style="list-style-type: none"> • Energy-efficient, self-regulating, dual-voltage, solid-state power supply • Patented water/oil coolant selector for a wider range of application compatibility • Patented electronic cell design that helps decrease service intervals • ErP-compliant, backward-curved, vibration-free, direct drive motorized impeller rated at 500 CFM @ 1.3" w.g. provides energy-efficient operation and increased performance to save on operating costs while performing well with increased airflow resistance from post filter or long duct lengths 	<ul style="list-style-type: none"> • Ten-foot power cord with molded plug • Quick-release, quarter-turn fasteners for fast, easy side-panel electrical compartment access reduces service and repair time • Door and gasket profile increases door-to-seal contact to prevent leakage and pooling of coolant inside of door • Door-latch spacers prevent over-compression of the gasket and increase gasket life

Air Quality Engineering, Inc. stands behind the quality of its MistBuster® product line with a limited 36-month warranty. Specifications subject to change without notice

Specifications

Dimensions 690mm L x 355mmW x 570mm H

Inlet Opening 422mm x 230mm


Weight 42kg

Accessories Machine mount stand | Pedestal stand
Ceiling mount kit | Wall mount kit

Plenum | Diffuser | HEPA post filter
ESF post filter | Carbon module

Specifications subject to change without notice

Dimensions*

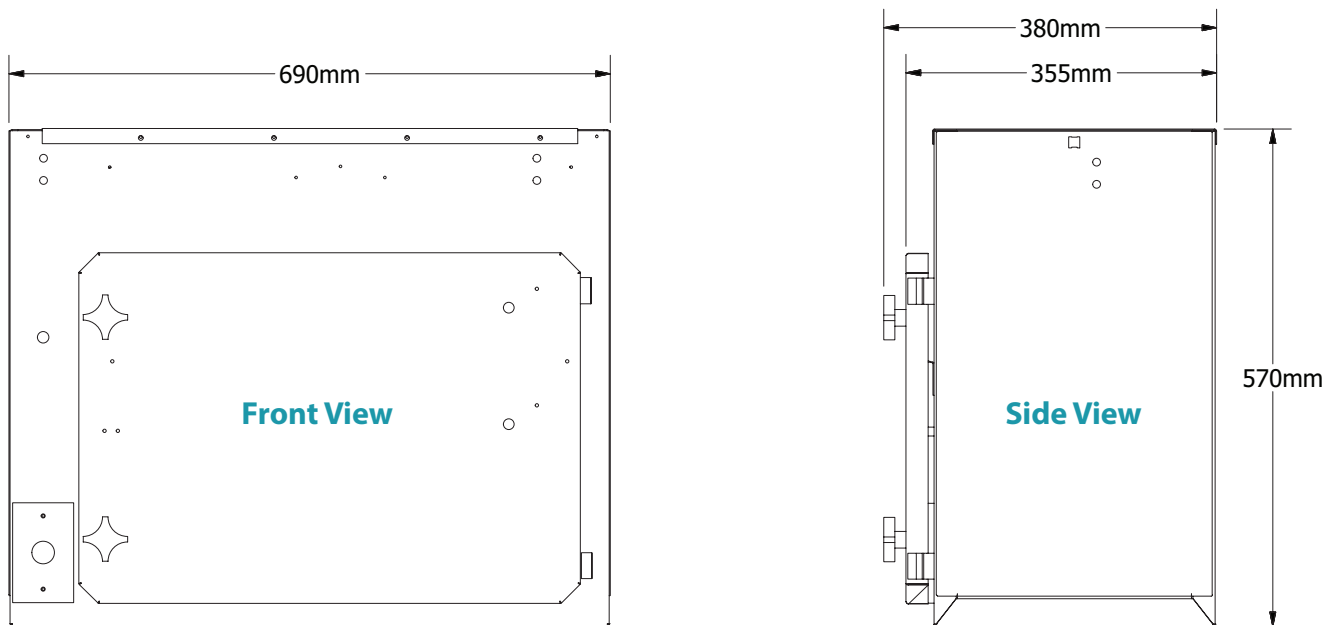

Bottom View

